

“Detach-A-Tap” - Removable Hose Union Tap

Model HUD - (Vandal & Frost Resistant) - Datasheet

Description

Removable wall mounted hose union tap with connection for universal garden components. A push-fit connection allows the tap outlet fitting to be removed when not in use, preventing any possible waste or misuse.

Inserting the tap outlet into the wall fitting automatically opens the flow of water with one simple action. Once the tap outlet has been inserted, it is free to rotate to find the optimum position for the desired use.

“Detach-A-Tap” can be wall mounted using the HUD Wall Mounting Plate (code PC15HUDWMP), where the 15 mm copper tube supplied passes through the wall. This arrangement offers good frost protection since none of the pipe is exposed. The square bodied “Detach-A-Tap” is best suited for this installation, available in natural brass.

Alternatively, a Wall Plate Elbow (code PC15TWPELB) can be used to accept a 15 mm copper supply pipe running vertically up or down the outside surface of the wall. This installation is better suited to the round bodied “Detach-A-Tap” (available in natural brass or chrome plated brass).


An optional Fluid Category 3 Installation Kit (code HUFC3INKIT) is available to meet the requirements of the Water Regulations. The Installation Kit includes – full bore servicing valve, low loss double check valve (model ED15C515), push-fit metal elbow and brass DN15 Inter-lock hose connector.

Specification

Pressure Supply	10 bar max.
Wall thickness	Any
Temperature	90° max.
Inlet	½" BSP male (15 mm copper with Wall Mounting Plate)
Outlet compatible with	Brass CK Inter-Lock & “Hozelock”

International Patent

Dimensions

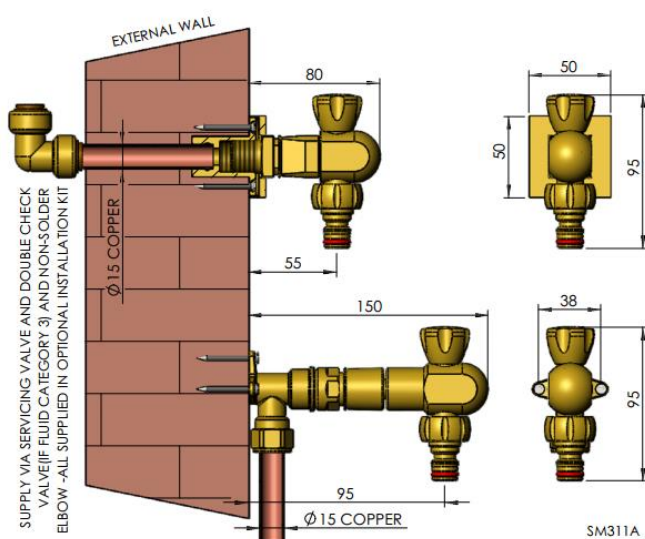

IN GENIUS



Push-fit connection allows tap to be easily removed when not in use

Water Regulations

The local water company can “risk assess” the proposed installation and determine the level of protection required (G15.18). A Double Check Valve is the minimum backflow protection required for Fluid Category 3 applications G15.20). This should be within the building and protected from freezing. A low loss Double Check Valve is supplied in the Installation Kit.

A DB Pipe Interrupter can be fitted for certain Fluid Category 4 applications, such as mini irrigation systems. By default, all non-house HU taps are Fluid Category 5 (G6.1e) requiring a dedicated Break Tank and Booster Set with type AB air gap (model BTAB or BTMIDI).

A Servicing Valve should be fitted to the supply (G11.1) – this is supplied in the Fluid Category 3 Installation Kit.

Codes and Descriptions

Code	Description
HUDBRS15	Detach-A-Tap Removable Tap Brass Square
HUDCRR15	Detach-A-Tap Removable Tap Chrome Round
HUDBRR15	Detach-A-Tap Removable Tap Brass Round
HUDDAB15	Detach-A-Tap Deluxe Removable Tap Antique Bronze
HUDDBR15	Detach-A-Tap Deluxe Removable Tap Brass
HUDDCR15	Detach-A-Tap Deluxe Removable Tap Chrome
HUDDCU15	Detach-A-Tap Deluxe Removable Tap Copper
HUFC3INKIT	Detach-A-Tap Fluid Category 3 Installation Kit
PC15TWPELB	Tectite 15x1/2" Wall Plate Elbow
PC15HUDWMP	HUD Wall Mounting Plate c/w 500 Copper Pipe
HUDTAPB	Replacement HUD Tap Outlet Brass
HUDTAPC	Replacement HUD Tap Outlet Chrome



Detach-A-Tap Deluxe – available in Antique Bronze, Brass, Chrome and Copper

Arrow Valves Ltd

Tel: 01442 823123

Fax: 01442 823234

www.arrowvalves.co.uk

Arrow Valves Ltd reserve the right to change specifications, design and materials at any time without notice.

All unit-less dimensions in mm.

© Copyright Arrow Valves Ltd 2020



Arrow Valves