

Ablution Plant - Model BTHW

Safe Hot Water with Fluid Category 5 Protection – Datasheet – Page 1 of 2

Description

The Ablution Plant unit delivers hot water at the required safe temperature with the highest backflow protection. The primary application is bidets or abluion hoses adjacent to a WC or bidet. The unit can also be used for many other applications requiring hot water with Fluid Category 5 protection.

Toiletry applications are strictly Fluid Category 5, requiring a point of use air gap from the mains water or building supply pipe. There is a duty of care to provide warm water at a safe temperature with suitable legionella controls in place.

The Ablution Plant is packaged in a cabinet - consisting of –

- Wall Bracket
- Solenoid filled Break tank with type AB air gap complying with BSEN13077: 2003
- Booster Pump
- Water Heater with thermostat and safety relief valve
- Thermostatic Mixing Valve (TMV3, DO8)
- Controls, fittings and sound proofing

There is a growing need to provide international toiletry facilities. This Ablution Plant helps with Muslim Qada al-Haajah requirements and forms part of the performance of Wudhu (Ablution for Prayer). The Ablution Plant is normally behind a removable panel in a washroom and delivers warm water to a trigger operated hose (supplied separately) adjacent to a toilet, bidet or wash area. This enables the users to hygienically clean themselves possibly without toilet paper.

The unit automatically switches on when a pressure drop is detected – e.g. when the user operates the trigger valve on the hose - optional extra. The pump has a “soft start” feature, which avoids water and electrical surges. The pump and heater are protected via a low level float switch in the cistern.

To enable a standard 13 A supply to be used - thus avoiding high current demands - the unit incorporates a 5 litre heater, which is factory set to 62°C (*Legionella bacteria die within 32 mins in water @ 60°C*).

The internal TMV blends the hot water down to 38°C (adjustable), which is maintained for a period – see Hot Water Capacity. An additional cold water outlet with Fluid Category 5 protection is optional (BTHW-OP1).

The unit is quiet by virtue of a high quality brass pump fitted with anti-vibration mounts, stainless braided internal hoses and thick fire proof sound insulation.

There are several optional upgrades – see page 2

Water Regulations

Bidets and any hoses used for toiletry purposes are classified as Fluid Category 5—the highest contamination risk—requiring a suitable air gap.

To prevent internal cross-contamination, WCs and bidets must have point-of-use Category 5 protection. In hotels, this typically means one unit per bathroom, as commonly required by water companies.

For legionella control, terminal fittings should reach final temperature within 30 seconds, typically achievable with ≤5 m of 15 mm copper pipe (G18.4).

Applications

Public buildings such as hotels, education departments, hospitals, healthcare and government buildings now frequently cater for multi-cultural use and are being suitably equipped.

- Ablution hose adjacent to a WC
- Bidets - ascending spray or with a flexible hose
- Medical & mortuary tables
- Veterinary & animal washing
- Laboratories
- Butchery

kiwa
approved
product



UK
CA | CE



Model BTHW-1
delivers safe hot
water with
Fluid Category 5
backflow protection

Specification		
Pressure Supply	bar	0.8 (min.) / 10 (max.)
Inlet Temperature	°C	1 to 25 max.
Outlet Temperature	°C	30 – 50 ± 2 (38 factory set) (Tamperproof adjuster in cabinet)
Safety Relief Valve	bar	6 (pressure relief)
Water Reg. Approval Status		2211706
Electrical Specification		
Voltage / Frequency	V / Hz	230 (1 Phase) / 50
Power Consumption	kW	2 (heater) + 0.4 = 2.4
Full Load Current	A	10.2 (inc. heater)
Heater Controls		Thermostat, safety temperature cut-out (manual reset)
Low Level Protection		Pump and heater (auto reset)
Materials		
Cabinet		Steel – powder coated RAL7032
Pump Wetted Parts		Brass
Heater Wetted Parts		Stainless Steel
Pipes / Fittings		Copper / Brass / Stainless
Cabinet Insulation		Sound absorbing fire retardant
Hoses		WRAS approved stainless braid

Connection Pipes

A stainless steel braided hose with Y strainer and servicing valve is supplied - as required by the Regulations (G16.4). The outlet and pressure relief are 15 mm Tectite.

Codes and Descriptions

Size	Code	Description
15 mm	BTHW-1	Ablution Unit-1 Hot FC5 TMV 230 V

Arrow Valves Ltd

Tel: 01442 823123

Fax: 01442 823234

www.arrowvalves.co.uk

Arrow Valves Ltd reserve the right to change specifications, design and materials at any time without notice.

All unit-less dimensions in mm.

© Copyright Arrow Valves Ltd 2009-2025




**Arrow
Valves**

Ablution Plant - Model BTHW


Safe Hot Water with Fluid Category 5 Protection – Datasheet – Page 2 of 2

Dimensions

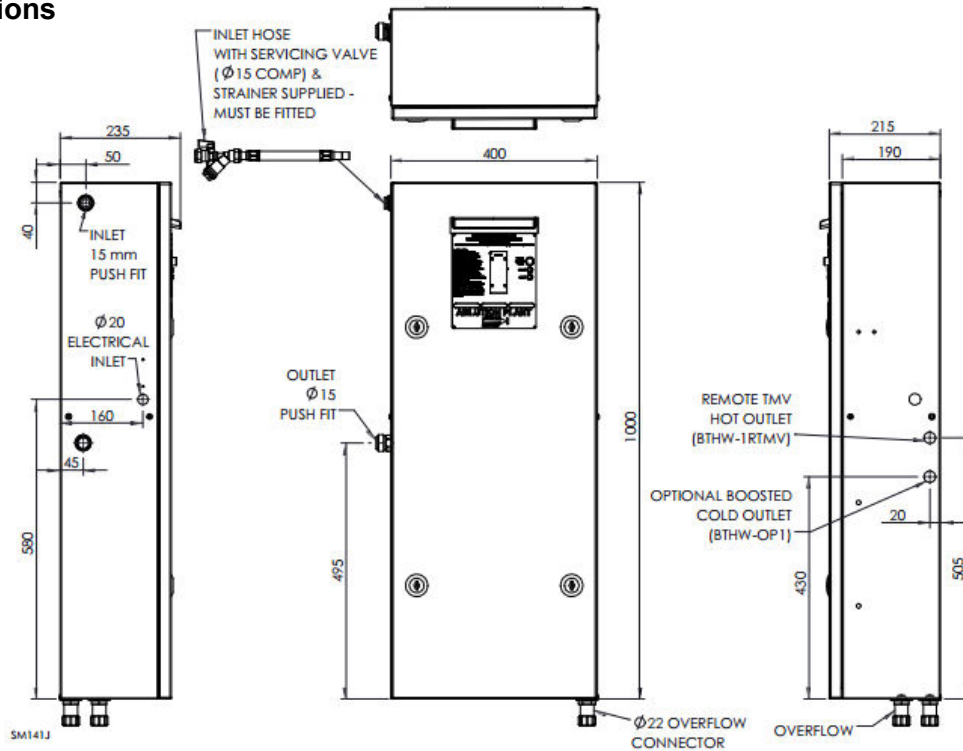


Hot Water Capacity

The standard unit (5 litre heater) at a flow rate of 0.07 Lt/s, can supply water at 38°C for 2 minutes then a reducing temperature for a further minute.

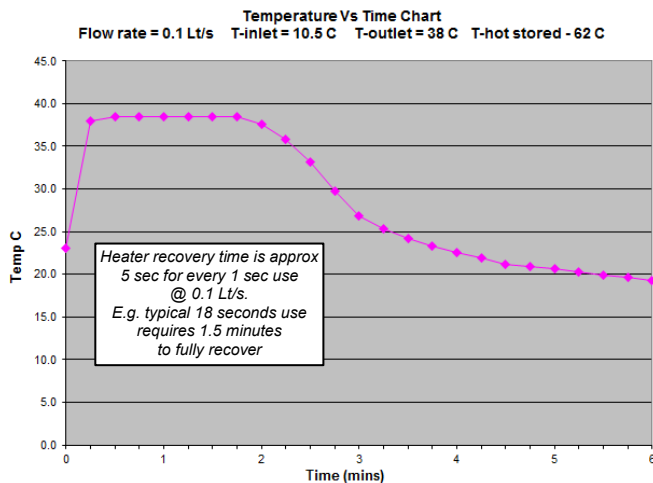

Pump Performance

The standard unit is limited to 0.07 Lt/s but user can change to 0.1 Lt/s and more pressure to the nozzle.

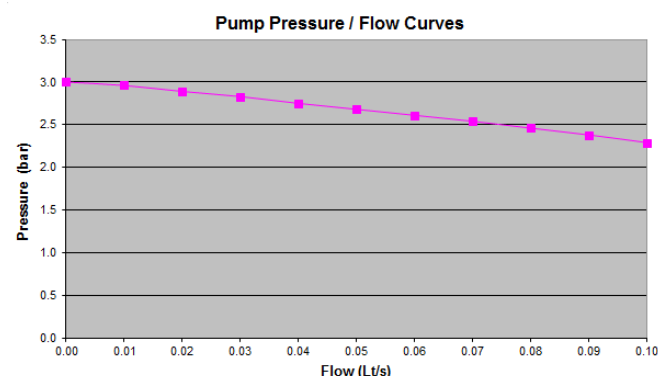

Installation Considerations – see O&M Manual

The unit should be mounted at a serviceable height. There must be sufficient clearance under the base of the cabinet to connect the overflow.

The servicing valve with flow limiter and flexible hose must be used.

The overflow/warning pipe should discharge in a safe and conspicuous manner. The safety relief valve also discharges via the overflow connection at the base of the cabinet.

Electrical - supply via a 2 pole isolator and RCD or RCBO.

Options

- Ablution hose and trigger Chrome.
- Cold water outlet (FC5 protection) in addition to hot
- Automatic Tank Purge – *legionella control*
- Drip Tray – *catches any leaks from a faulty unit*
- BMS fault monitor (BTBMS3) – volt free with changeover. Activates fault lamp and BMS relay if tank water level is too high or low, or if there is a low pressure fault.
- Remote Thermostatic Mixing Valve (if >5 m pipe run)

Code	Description
CSHT-2	Ablution Hose & Trigger Chrome
BTHW-OP1	Ablution FC5 Cold Water Outlet Option
BTHW-OP2	Automatic Tank Purge System /24h
BTHW-1RTMV	BTHW-1 with Remote TMV
BTBMS3B	BTMD/BTHW Alarm BMS - Volt Free
BTDT4	Drip Tray for Midi range Stainless

Arrow Valves Ltd

Tel: 01442 823123 Fax: 01442 823234

www.arrowvalves.co.uk

Arrow Valves Ltd reserve the right to change specifications, design and materials at any time without notice.

All unit-less dimensions in mm.

© Copyright Arrow Valves Ltd 2009-2025



Arrow Valves