

Tap Box – Secure Outside Hose Tap – Tamperproof/Frost Resistant

Models HUTB - Datasheet - Page 1 of 2

Description

Compact wall mounted stainless steel box with spherical type tap and hose connection. The tap is foam insulated and therefore offers reasonable frost protection. *For a concealed / telescopic tap – see “Conceal-A-Tap” model HUC datasheet.*

The Tap Box has a hinged lid, which can be padlocked closed. A hose shield is available as an extra, which improves frost protection and prevents unauthorised removal of the hose or Pipe Interrupter. The Tap Box is available to suit most configurations -

Model **HUTB** is rear entry, where the copper tube supplied passes through the wall. This arrangement offers good frost protection since none of the pipe is exposed. The factory-fitted 500 mm length of copper tube is cut to length after installation. This model is also available in 22 mm, which has a larger tap and box, plus higher flow rate and better frost protection. For new installations where at least 30 mm of copper tube is already protruding from the external wall, it is possible to fit the Tap Box model HUTB after removing the copper tube supplied. *Note “Oyster” dimpling pliers are required – code PCY77267.*

Specification

Pressure Supply	10 bar max.
Inlet (HUTB)	15 mm or 22 mm copper tube
Outlet (15 mm / ½" inlet)	Inter-Lock Plug (quick release) (compatible with Hozelock)
Outlet (22 mm) (Optional for 15 mm)	¾" Male BSP, with removable Inter-lock Plug adapter.
Box material	304 Stainless Steel - polished
Water Regulations Approval	2503860

Servicing

The spherical valve features maintenance free PTFE seats.

Water Regulations

The local water company can “risk assess” the proposed installation and determine the level of backflow protection required. A Double Check Valve is the minimum backflow protection required for Fluid Category 3 applications. This should be within the building and protected from freezing. *A low loss Double Check Valve is supplied in the installation kit.*

By default, all non-house HU taps are Fluid Category 5 requiring a dedicated Break Tank and Booster Set with type AB air gap (model BTAB or BTMIDI).

A servicing valve must be fitted to the supply – *this is supplied in the optional installation kit.*



Model HUTB15
(shown with optional padlock
and hose connector socket).
Polished stainless steel box.
The rear entry copper tube
passes through the wall (use
sleeve or insulation) and is
cut to length after installation.



Certified Product to
NSF REG4 S3



Options

Installation kits – model HUTB only – ½" or ¾" - includes – Servicing valve, Double Check Valve, Tectite elbow (since soldering not permitted), brass hose connector and fasteners.

Non Hose Union Outlet – for when a non hose connection is required at the tap outlet, add NHUC to the end of the product code (e.g. HUTB15NHUC).

Padlocks – high anti rust, model SP35 supplied with 2 keys or code SPCP1 has four digit combination.

Hose connector sockets – Brass quick release coupling for connecting a hose to the Tap Box outlet plug. Codes - HUG7903 (½"), HUG7933 (¾"). *Note hose connector plug is common to ½" and ¾" Tap Boxes. Compatible with Hozelock.*

Male Outlet – The ½" Tap Box is normally supplied with Hozelock compatible hose plug outlet. A conventional ¾" male thread with removable hose plug is available – code HUG791575M.

Oyster Pliers - For new installations where at least 27 mm of copper tube is already protruding from the external wall. The copper tube fitted to the HUTB must be unscrewed and discarded. No sealants or soldering required.

Codes and Descriptions

Size	Code	Description
½"	HUTB15	1/2" Hose Tap Box - 500 Copper Tube
½"	HUTB15NHUC	1/2" Hose Tap Box - 500 Copper Tube Non Hose Union Connection
¾"	HUTB22	3/4" Hose Tap Box - 500 Copper Tube
¾"	HUTB22NHUC	3/4" Hose Tap Box - 500 Copper Tube Non Hose Union Connection
Options Below		
½"	HUTBINKIT15	1/2" HUTB Installation Kit 15 mm
¾"	HUTBINKIT22	3/4" HUTB Installation Kit 22 mm
½"	HUG791575M	Male Outlet (¾") Hose Plug – ½" Tap Box
	SP35	Padlock c/w 2 Keys KA - Std Shackle
	SPCP1	Squire Padlock Combination - High Anti Rust
DN15	HUG7903	DN15 Hose Connector Inter-Lock Socket
DN20	HUG7933	DN20 Hose Connector Inter-Lock Socket
15 & 22	PCY77267	Oyster Dimpling Pliers



Arrow Valves Ltd

Tel: 01442 823123 Fax: 01442 823234
www.arrowvalves.co.uk

Arrow Valves Ltd reserve the right to change specifications, design and materials at any time without notice.
All unit-less dimensions in mm.


© Copyright Arrow Valves Ltd 2004-2025



**Arrow
Valves**

Tap Box – Dimensions

Models HUTB - Datasheet - Page 2 of 2

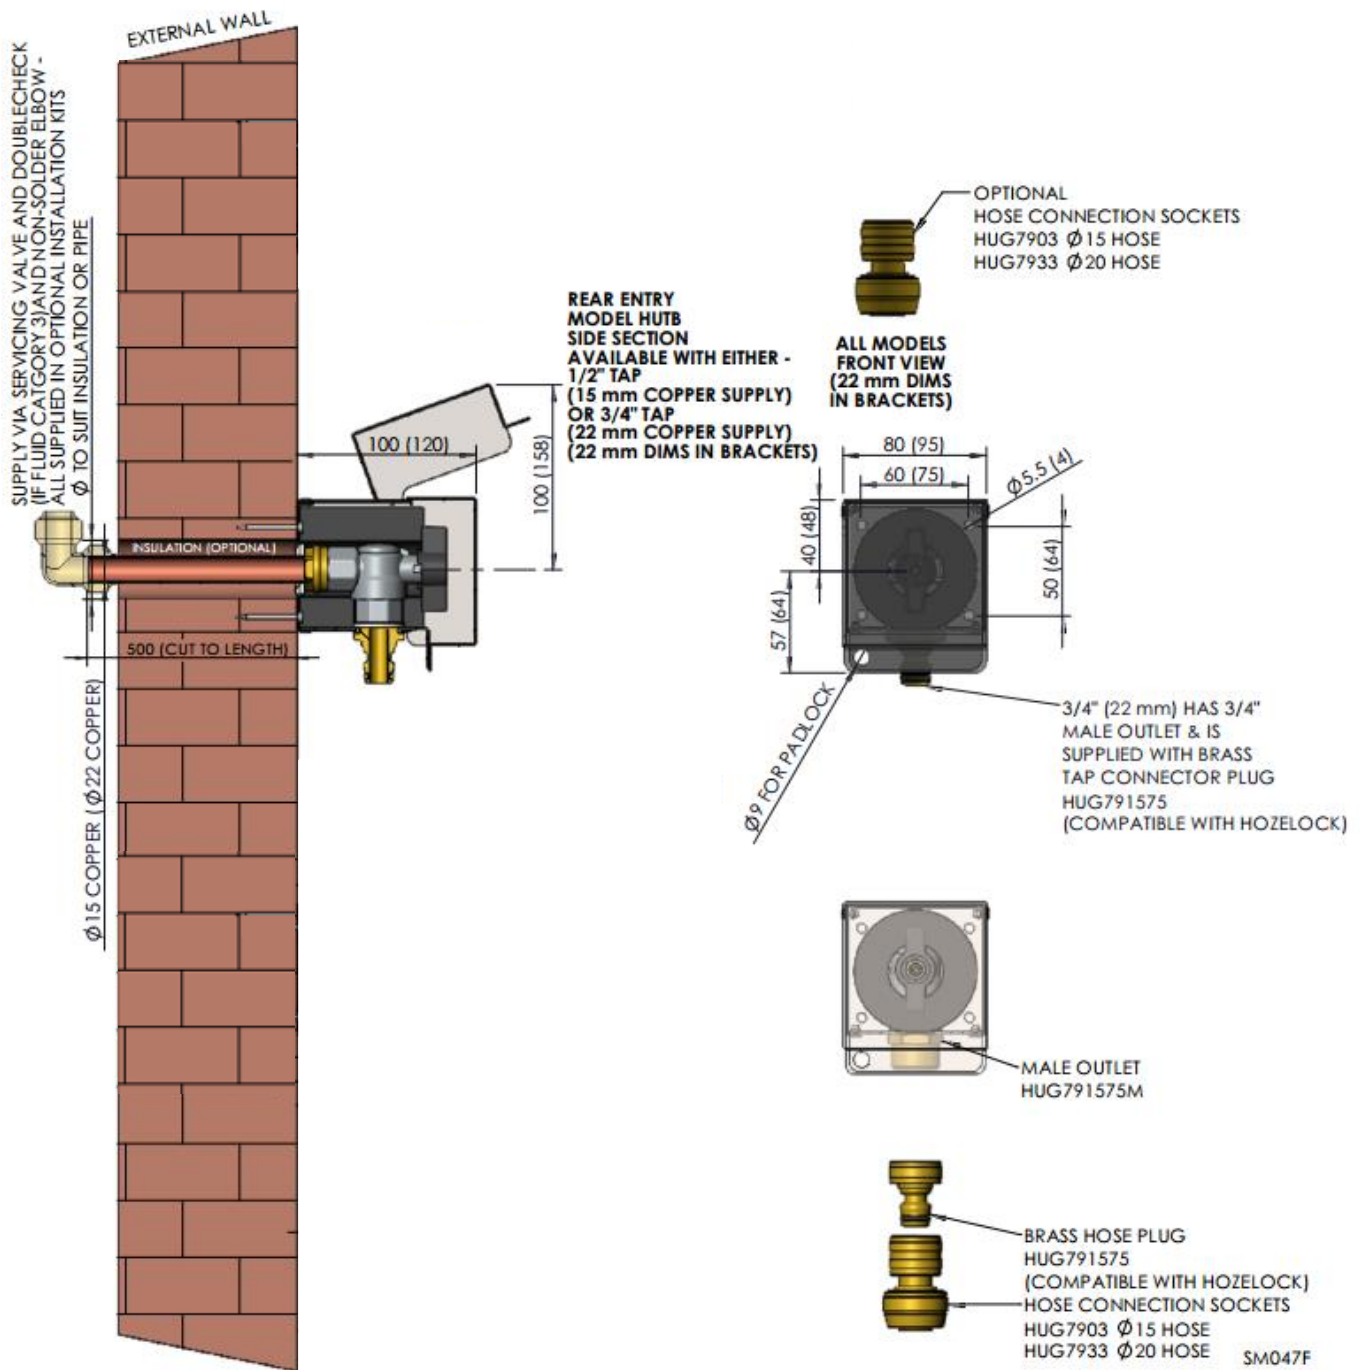

Arrow Valves Ltd

Tel: 01442 823123 Fax: 01442 823234
 www.arrowvalves.co.uk

Arrow Valves Ltd reserve the right to change specifications, design and materials at any time without notice.
 All unit-less dimensions in mm.

© Copyright Arrow Valves Ltd 2004-2025



Arrow Valves